



Aquila 28 Molokai Cuddy Power Catamaran Specifications

Length overall	9.38 M / 30' 9"
Hull length	8.6 M / 28' 2"
Beam	2.96 M / 9' 8.5"
Hull draft (motors up)	0.34 M / 1' 1.2"
Hull draft (motors down)	0.77 M / 2' 6"
Bridgedeck clearance	0.32 M / 1' 0.5"
Trailing height* (excluding electronics and trailer) *Measured from keel to top of fiberglass hardtop without electronics installed, not including the trailer.	3.37 M / 11' 0.5"
Dry weight (with dual 150 HP outboard engines)	2,797 KG / 6,166 LB

Tankage

Fuel tank (approx.)	2X 285 = 570 L / 2X 75 = 150 GAL
Fishbox capacity (2 fish boxes)	2X 356 = 712 L / 2X 94 = 188 GAL
Removable Livewell capacity (option)	113 L / 30 GAL
Freshwater capacity (option)	40 L / 10.6 GAL


CE certification B (offshore):8 PAX; C (coastal):12 PAX; D (inland):14 PAX

Propulsion


Standard	2X MERCURY 150 HP (300 HP total)
Optional	2X MERCURY 225 HP (450 HP total)

Features

- Proven and tested hull design from Hawaiian waters offering best in class offshore handling capabilities
- Highest tunnel clearance in class offering better air cushion and reduced hull noise when fishing/trolling
- Designed for comfort and dry ride offshore with an excellent aft area for various forms of fishing, diving or other water sport activities
- Central walkthrough with removable door at transom offering direct access to stern; excellent for fishing, diving, and recreational water access
- Class leading deck space for fishing and entertainment
- Quality electric including AGM batteries as standard

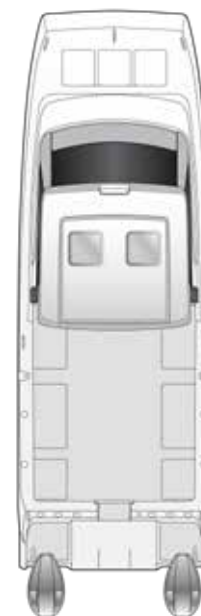

**STANDARD
MAIN DECK W/ TOP**

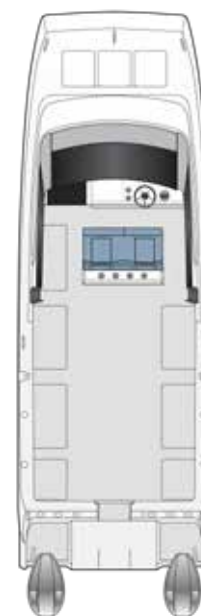

**STANDARD
MAIN DECK**

All specifications and options are subject to change by Sino Eagle Yachts at their sole discretion. Performance is purely indicative and not a contractual commitment. Performance is subject to many variances outside the control of Sino Eagle Yachts. Specifications and graphics in this brochure are non binding and customer must enter into contractual agreement with the Dealer or Agent of Record.

Hull Features

Aquila Protection Plan: 5 Year hull/deck structural warranty
 White gelcoat
 Vinyl ester resin infused hull, deck, cockpit floor and bulkheads
 Infused fiberglass structural grid
 Bow eye 316L stainless steel
 Integrated transom walkthrough between engines
 Rub rail: High density PVC with solid 316L stainless steel insert
 Four (4) separated compartments in each hull which can be individually drained or completely isolated
 Designated below deck rigging conduits
 Stainless steel drain plugs in each hull at transom

Deck Features

Rub rail with solid 316L stainless steel insert
 Molded one piece deck and cockpit liner with non-skid pattern area
 Flush mounted integral anchor locker with fiberglass lid
 Flush mounted lockers on port and starboard side of anchor locker with fiberglass lid
 One (1) bow fixed cleat 8"/bollard
 Two (2) bow 8" pop up cleats
 Two (2) stern 8" pop up cleats
 Two (2) through bolted 8" pop up midship cleats
 Transom stainless steel rails bolted to deck for ease of water access with anchorage for optional swim ladder or optional sled
 Bolster foam installed on gunwale aft of cuddy
 Deck access fiberglass storage locker on port and starboard side of helm console for dry storage
 Designated fiberglass deck access lockers for easy access to aluminum fuel tanks
 Port and starboard aft cockpit floor access to mechanical area
 Centrally located aft cockpit drop in door
 Raw water outlet in cockpit with hose

Cuddy Features

Fiberglass hardtop with dedicated radar, antenna and spotlight locations
 Lightly tinted laminated glass windshield
 Lightly tinted perspex side windows with integrated sliding opening windows
 Tilt up LED anchor/running light
 Port and starboard LED running lights
 Electrical 12v horn recessed mounted
 Two (2) aft recessed mounted spreader lights to light up aft deck area
 Six (6) rod holders moved to aft when purchasing extended canopy option
 Five (5) drink holders located behind helm seats
 Two (2) custom designed helm seating
 Two (2) molded helm seat consoles with two (2) drink holders
 316L stainless steel grab rail at helm console
 Integrated hatches allowing easy access to batteries, and electrical connections
 Overhead 12v switch light
 Two (2) opening deck hatches
 Access door to cuddy
 Hinged floor to allow porta potti location and/or additional storage
 Bunk with cushion across front of cuddy
 Small storage area under bunk

Easy access to electrical, throttle and steering controls for maintenance
 Molded floor
 Designated push button reset 12v fuse panel
 Cover to protect electrical connections
 Overhead light in cuddy

Fishing Features

Under gunwale shelf storage (port and starboard)
 Designated fiberglass fish boxes (2 x 94 gal each), insulated and diaphragm pumps with overboard discharge (port and starboard)
 Six (6) stainless steel vertical rod holders in transom
 Gunwales ready to receive up to four (4) rod holders per side (specify on option sheet)
 Reinforcement for outrigger gunwale holder (to be installed by dealer or buyer)

Helm

Stainless steel steering wheel with control knob on tilt helm
 12v switch panel with push button switches
 Compass
 Bilge pump red indicator light
 Integrated glove box with 12v outlet and USB charger
 Dedicated rocker switches for navigation lights and pumps
 Two (2) cup holders
 Storage troughs in front of steering wheel and on top of dash board
 Mercury digital SmartCraft gauges (1 per engine)

Electrical Systems

All wires run through PVC conduits for ease of rigging
 Dedicated battery switches located under helm seat
 Three (3) AGM battery system: port engine (1), starboard engine (1), and house (1)
 Custom built FRP battery tray for house and starter batteries
 Electronics fuse push to reset fuse panel
 One (1) 12v outlet with a total of three (3) USB chargers

Mechanical Space

Molded hatch with gasket for easy access
 Each hull with 750 gph bilge pump with red indicator light at helm
 Raw water washdown pump with filter and hose
 Two (2) macerator pumps for fish boxes
 Mercury power steering pump
 Valve for draining each individual hull compartment

Fuel System

Two (2) molded hatches on deck with compression latches for easy access to tank fittings
 Two (2) EPA compliant custom aluminum 75 gal fuel tanks with engine pickups, shut off valves, digital level indicator and two (2) deck fuel plates
 Two (2) Mercury water separating fuel filters

AVAILABLE PACKAGES


**More options available than shown. For a full listing please review with sales consultant.*



EXTENDED SUN CANOPY



OPTION MAIN DECK
W/ TOP AND CANOPY

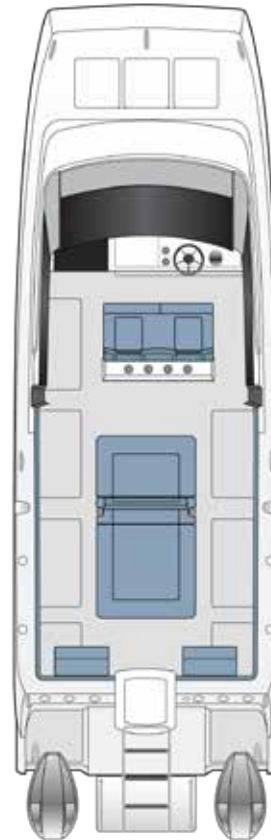

OPTION
MAIN DECK

